




# SELF-CONTAINED EMERGENCY EXIT SIGN

## SERIES: SLR-PL

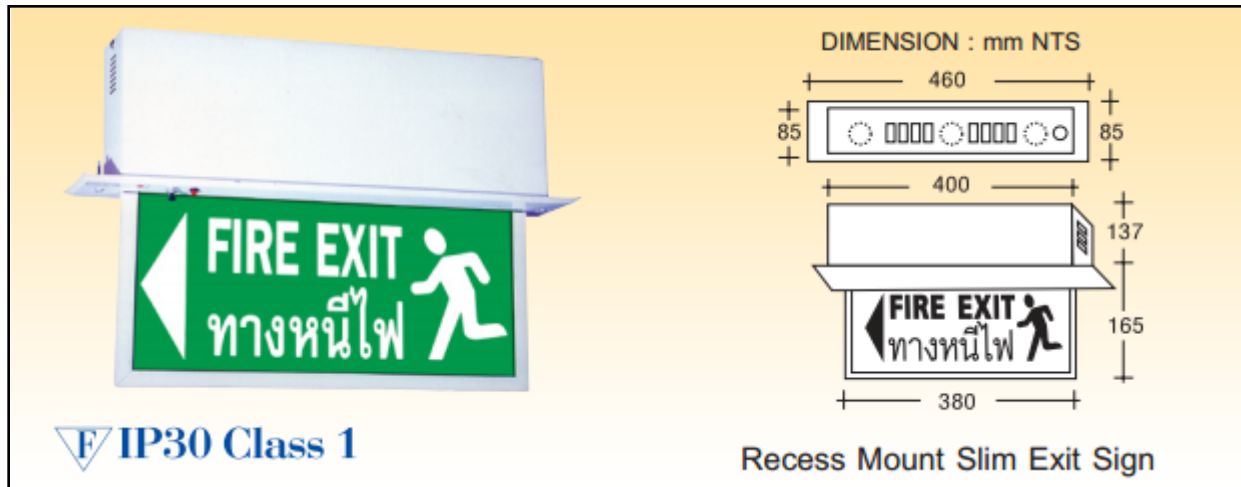

This Recess-Mounted Exit Sign is designed with the control gear being mounted behind the ceiling. Only an elegant slim plate with the printed legend is visible. The gear tray is removable and is independent of the housing to facilitate ease installation, maintenance and replacement of lamps. It also function as a reflector to increase light output and homogenous light distribution.

### SPECIFICATIONS

- MODE OF OPERATION :  MAINTAINED
- LAMP :  1 X 11W. PL 4PIN LAMP
- RATE DURATION : 2 HRS & OTHERS
- MAIN SUPPLY : 220 VOLT, 50Hz & OTHERS
- POWER CONSUMPTION : 4VA / 13VA
- BATTERY : HIGH TEMP NICKLE CADMIUM
- CHARGER : AUTOMATIC CONSTANT CURRENT
- CHARGER MONITOR : RED L.E.D. Ø 5mm.
- TEST FACILITY : MICRO SWITCH
- SAFETY FEATURE : LOW VOLT CUT-OFF PREVENTING  
BATTERY OVER DISCHARGE
- FITTING CONSTRUCTION : ELECTRO GALVANISED STEEL WITH  
EPOXY POWDER COATING
- DIFFUSER : FIRE RETARDANT ACRYLIC
- LEGEND : ISO GREEN, OTHER LEGEND OPTIONAL
- MOUNTING : RECESS MOUNTED
- CABLE ENTRY : Ø 20mm. K/O HOLE
- COMPLIANCE : IEC 598-2-22

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
SLR S1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	SINGLE	2 HOURS	3.0 KG.
SLR D1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	DOUBLE	2 HOURS	3.0 KG.