




SELF-CONTAINED EMERGENCY EXIT SIGN

SERIES: ELS-PL

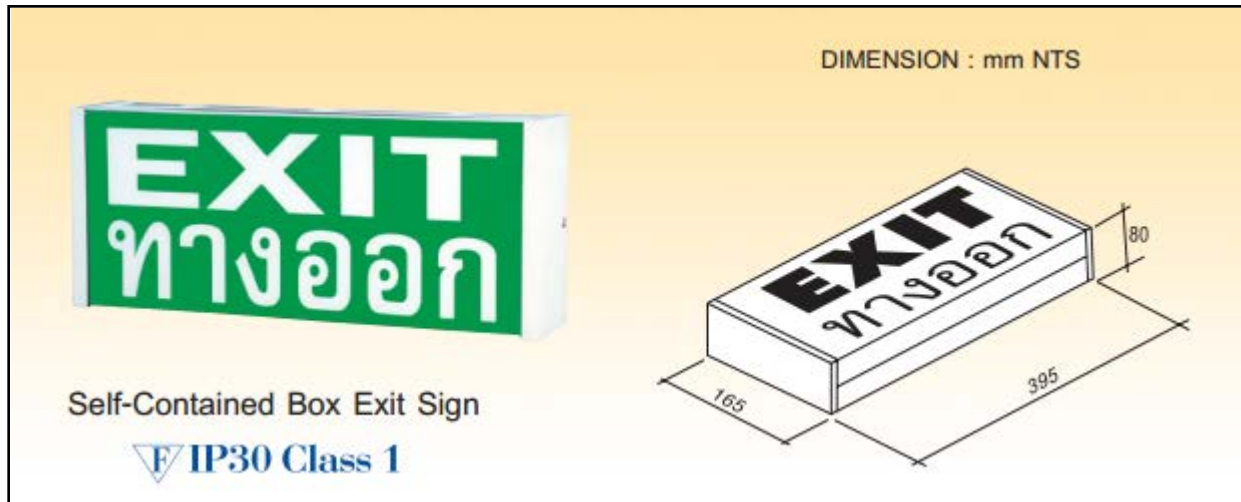

The gear tray that is removable and is independent of the housing to facilitate ease of installation, maintenance and replacement of lamps. It also functions as a reflector to increase light output and Homogenous Light Distribution.

SPECIFICATIONS

- MODE OF OPERATION : MAINTAINED SUSTAINED
- LAMP : 1 X 11W. 2 X 11W. PL 4PIN LAMP
- RATE DURATION : 2 HRS & OTHERS
- MAIN SUPPLY : 220 VOLT, 50Hz & OTHERS
- POWER CONSUMPTION : 4VA / 13VA
- BATTERY : HIGH TEMP NICKLE CADMIUM
- CHARGER : AUTOMATIC CONSTANT CURRENT
- CHARGER MONITOR : RED L.E.D. Ø 5mm.
- TEST FACILITY : MICRO SWITCH
- SAFETY FEATURE : LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE
- FITTING CONSTRUCTION : ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING
- DIFFUSER : FIRE RETARDANT MOULDED ACRYLIC
- LEGEND : ISO GREEN, OTHER LEGEND OPTIONAL
- MOUNTING : WALL OR CEILING
- CABLE ENTRY : Ø 20mm. K/O HOLE
- COMPLIANCE : ICE 598-2-22

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
ELS 1FL10	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	SINGLE	2 HOURS	3.0 KG.