


NFS2-640

Unparalleled Agility

- 1 SLC, expandable to 2
- 636 intelligent points (159 detectors/159 modules per SLC)
- 4 on-board NACs
- Optional integrated digital voice evacuation (DVC) support
- Networkable (NOTI-FIRE-NET - standard or high-speed)
- 80 or 640 character LCD display with QWERTY keypad
- BACNET/IP and MODBUS/IP compatible

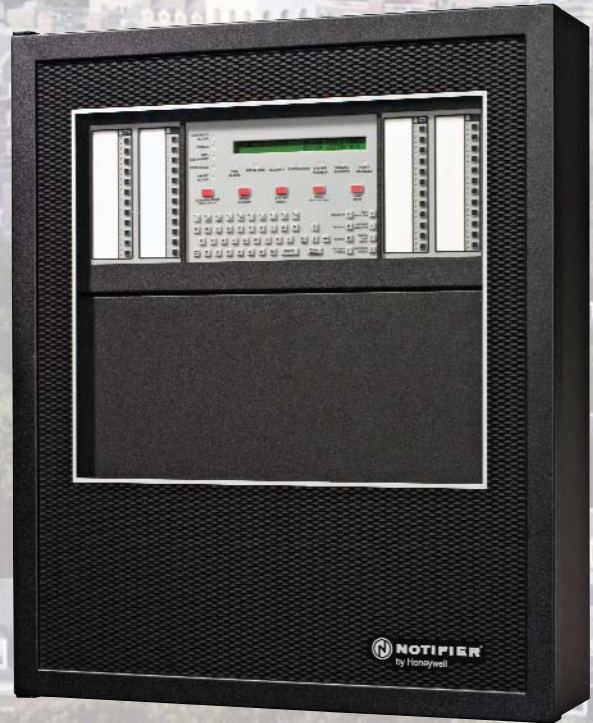

The NFS2-640 is ideal for mid-size applications, and easily expanded via NOTIFIER's intelligent fire alarm network, NOTI-FIRE-NET, to accommodate future building expansion.



Adapts to Your Needs

The NFS2-640's modular design maximizes flexibility and allows customization to your specific fire protection needs. And should those needs change in the future, the NFS2-640 can adapt with the addition or removal of system modules.

Adapts to Your Environment

Using ONYX Intelligent Sensing algorithms - built into every ONYX Series panel - the NFS2-640 learns the environment in which the smoke sensors are installed. The NFS2-640 self-optimizes each individual sensor alarm thresholds to speed response times and minimize, if not eliminate, nuisance alarms.

Data Centers