


# NFS2-3030

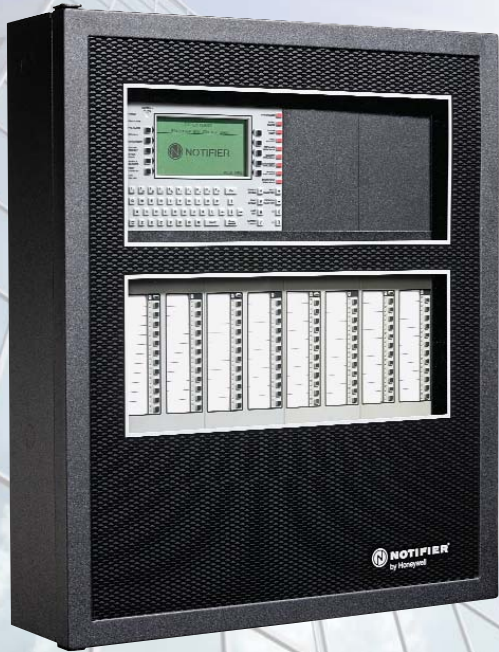

## Sheer Power and Performance

- 1 SLC, expandable to 10
- Supports 3,180 intelligent points (159 detectors/159 modules per SLC)
- Optional integrated digital voice evacuation
- Networkable (NOTI-FIRE-NET - standard or high-speed)
- 640 character LCD display with QWERTY keypad
- 1000 logic equations
- BACNET/IP and MODBUS/IP compatible

The NFS2-3030, with its impressive point capacity and powerful programming options, is the complete solution for large scale applications requiring superior performance.

### Customization

The true power of the NFS2-3030 lies in its modular design. The NFS2-3030's multiple annunciator options allows authorized users to view and control the system from virtually anywhere in the facility.

### Capacity

The NFS2-3030 supports over 3,000 intelligent devices on ten Signaling Line Circuits (SLCs) – perfect for protecting high-rises, large manufacturing plants, or multiple campus buildings with a single panel. When additional protection is required, the NFS2-3030 can be expanded with additional panels using NOTI-FIRE-NET, NOTIFIER's intelligent fire alarm network.



High Rise Buildings